

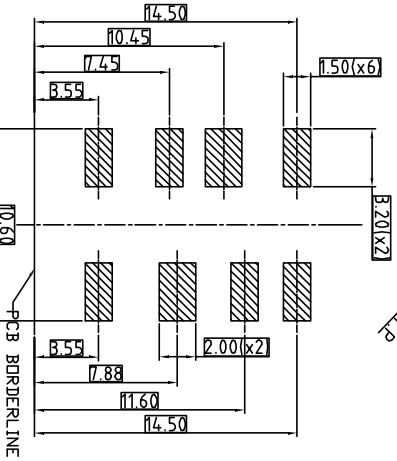


Notes:

1. Dimension shall be interpreted per ASME Y14.5M1994
2. Dimension marked ∇ & \blacktriangledown should be checked by Q.C. and process, engineers and ∇ should also check the CPK data.

Specification:

1. Current Rating: 10 AMP
2. Voltage Rating: 100V AC,DC
3. Dielectric Strength: 500V AC RMS for 1 minute.
4. Contact Resistance: 30 m Ω Max.
5. Insulator Resistance: 500M Ω Min. AT 250V DC.
6. Mating/Unmating cycles: 2000cycles
7. Temperature: -20 $^{\circ}$ C to +60 $^{\circ}$ C



(NOMINAL POSITIONS OF PADS ON FULL DEFLECTION OF TERMINALS)

RECOMMENED P.C.BOARD LAYOUT(TOP VIEW)
GENERAL TOLERANCE:±0.05

REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PROPOSE ONLY	ERIC	08-05-12

ITEM	PART NAME	Q'TY	FINISH	NOTE
9	PET	1		
8	Housing	1		
7	Shell	1		
6	Contact-6	1		
5	Contact-5	1		
4	Contact-4	1		
3	Contact-3	1		
2	Contact-2	1		
1	Contact-1	1		

UNLESS OTHERWISE SPECIFIED TOLERANCES

深圳市精睿兴业有限公司
SHENZHEN KRCONN TECHNOLOGY CO., LTD

TITLE	5310 EARPHONE JACK ϕ 3.5 8PIN
DWN	Johnie
CHKD	Kevin.d
APVD	
PART NO.	9102-00815-02R
SCALE:1:1	
UNIT:	mm
SIZE:	A4
SHEET:	10F 1
REV:	A

CUSTOMER COPY