REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PROPOSE ONLY	SIMON	08-04-12

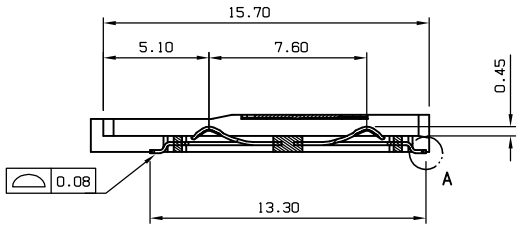



DETAL A
SCALE 5.1

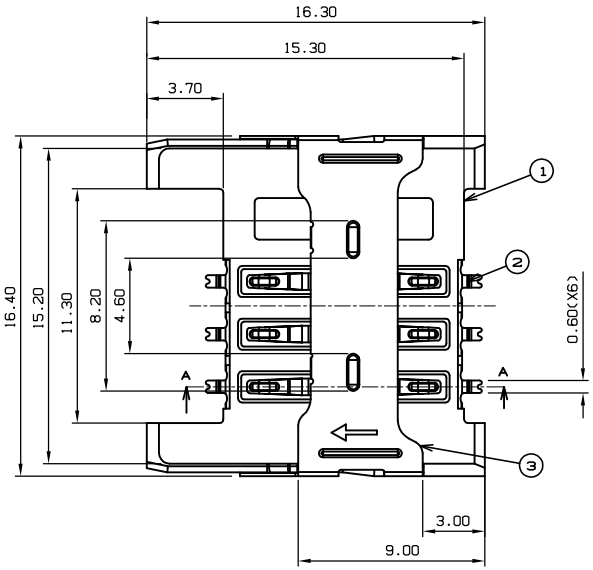

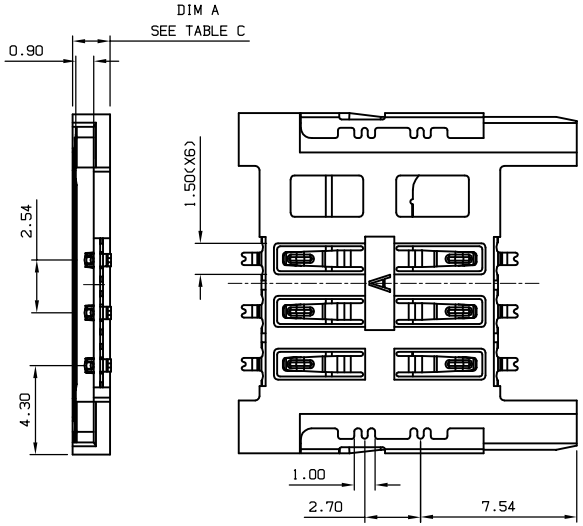

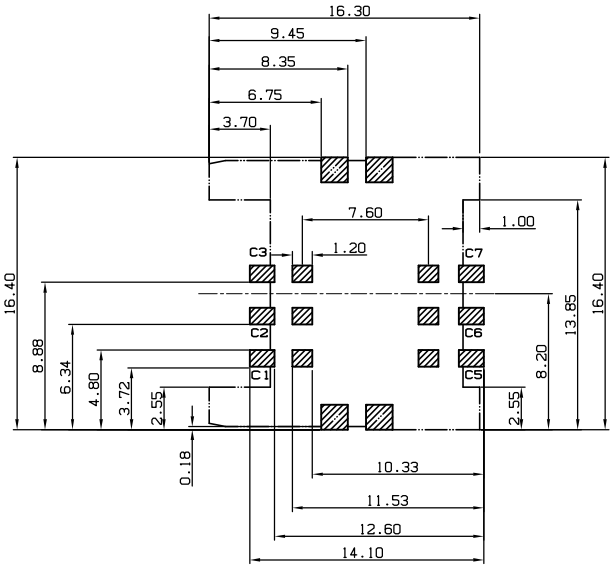

RECOMMENDED PC BOARD LAYOUT
TOLERANCE. ±0.05[TOP VIEW]

TABLE C.

DESCRIPTION	TYPE	DIM A	P/N
CONTACT: AU SHELL: SOLDERABLE NICK: WITH STOP: H=2.2mm	H=2.2mm	2.20	9502-00615-12R
CONTACT: AU SHELL: SOLDERABLE NICK: WITH STOP: H=2.0mm	H=2.0mm	2.00	9502-00615-11R
CONTACT: AU SHELL: SOLDERABLE NICK: WITH STOP: H=1.8mm	H=1.8mm	1.80	9502-00615-10R

NOTES.
1.0 RATING.
1.1 VOLTAGE.12 VAC (rms)
1.2 CURRENT. 1 AMPERES MAX. PER CONTACT
1.3 OPERATION TEMPERATURE RANGE. -25°C~+70°C
2.0 ELECTRIC CHARACTERISTIC.
2.1 CONTACT RESISTANCE.60mΩ MAX.
2.2 INSULATION RESISTANCE. 1000MΩ MIN.
2.3 DIELECTRIC WITHSTANDING
VOLTAGE.500V AC FOR 1 MINUTE
3.0 OPERATION LIFE. 10000 CYCLES
4.0 MATERIAL/FINISH.SEE TABLE A
5.0 CONTACT PIN ASSIGNMENT.SEE TABLE B

PIN NO.	PIN NAME
P/1 OR S1	Supply Voltage Vcc
P/2 OR S2	Reset(RST)
P/3 OR S3	Clock(CLK)
P/4 OR S4	N/A
P/5 OR S5	Ground
P/6 OR S6	Programming Voltage Vpp
P/7 OR S7	I/O
P/8 OR S8	RESERVED

NO.	DESCRIPTION	QT.Y	MATERIAL	NOTE
3	TERMINAL	6	COPOER ALLOY	CONTACT 15u" Au OVER ALL.
2	HOUSING	1	THERMOPLASTIC	UL 94V-0
1	SHELL	1	STAINLESS	Sn 80u" OVER ALL.

UNLESS OTHERWISE SPECIFED TOLERANCES

DECIMALS.		ANGLES.	
X	±0.5	X	±2°
X.X	±0.20	X.X	±1°
X.XX	±0.10		

深圳市精睿兴业科技有限公司
SHENZHEN KRCONN TECHNOLOGY CO. , LTD

TITLE	SIM CARD CONN. ASSEM			
DWN	JOHNLE	PART NO. SEE TABLE C		
CHKD	KEVIN.D	SCALE.1.1	UNIT. mm	
APVD	SIMON.M	SIZE. A4	SHEET.1OF 1	REV. A

CUSTOMER COPY