


PRODUCT NUMBER ORDER


93 02-010 15-01 R



- 1 PRODUCT NMAE:93=USB SERIES
- 2 PRODUCT :02=FEMALE
- 3 POSITION OF CONTACT (010=10PIN)
- 4 PLATING TYPE:  
15:15U" ON CONTACT AREA,SOLDER -TAIL 1-3 G/F
- 5 01:STREAM NO.
- 6 R=REEL PACKAGE

NOTE:

1. ELECTRICAL CHARACTERISTICS
  - 1-1. CONTACT RESISTANCE: 80 MILLIOHMS MAX.
  - 1-2. INSULATION RESISTANCE: 1,000 MEGOHMS MIN.
  - 1-3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC MIN
- FOR 1 MINUTE.
- 2-2. DURABILITY: 10,000 CYCLES
- 2-3. PRODUCT COMPLIED WITH HSF

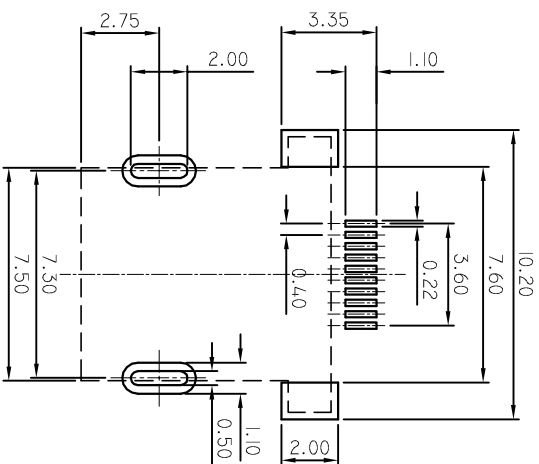

PCB LAYOUT(TOP VIEW)

(TOLERANCE:±0.05)

4	CONTACT 02	5	PHOSPHOR BRONZE	GOLD PLATED OVER ALL
3	CONTACT 01	5	PHOSPHOR BRONZE	GOLD PLATED OVER ALL
2	HOUSING	1	L.C.P	COLOR:BLACK
1	SHELL	1	PHOSPHOR BRONZE	TIN 100U" PLATING
NO.	DESCRIPTION	QTY	MATERIAL	NOTE
UNLESS OTHERWISE SPECIFIED TOLERANCES				
<p>深圳市睿兴业科技有限公司 SHENZHEN KRCCONN TECHNOLOGY CO., LTD</p>				
DECIMALS:		ANGLES:		
X	:±0.5	X	:±2°	
X.X	:±0.20	X.X	:±1°	
X.XX	:±0.10			
TITLE		MINI USB 10PIN DIP+SMT TP.		
DWN	ALLEN	PART NO.: 9302-01015-01R		
CHKD	KEVIN	SCALE:1:1 UNIT: MM		
APVD	ERIC.W	SIZE: A3	SHEET:1 OF 1	REV. A

CUSTOMER COPY

REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PROPOSE ONLY	ALLEN	04/14/08