
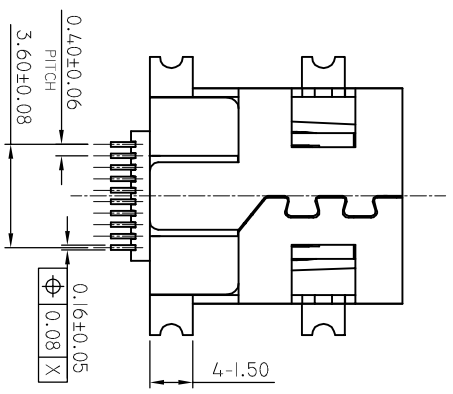
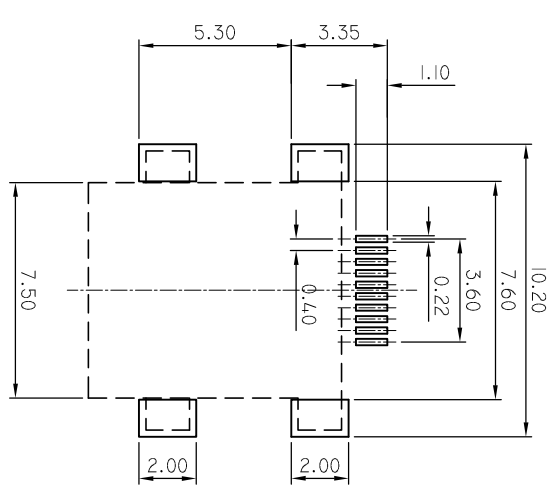
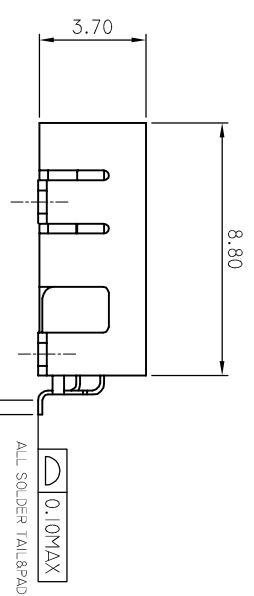
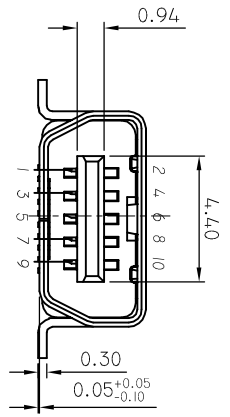
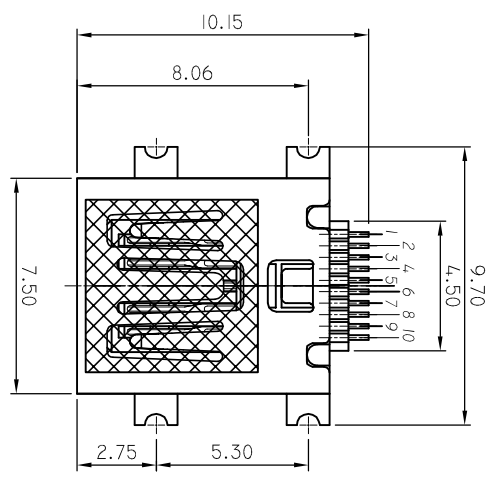


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PROPOSE ONLY	ALLEN	04/14/08


NOTE:

- 1. ELECTRICAL CHARACTERISTICS
- 1-1. CONTACT RESISTANCE: 80 MILLIOHMS MAX.
- 1-2. INSULATION RESISTANCE: 1,000 MEGOHMS MIN.
- 1-3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC MIN FOR 1 MINUTE.
- 2-2. DURABILITY: 10,000 CYCLES
- 2-3. PRODUCT COMPLIED WITH HSF

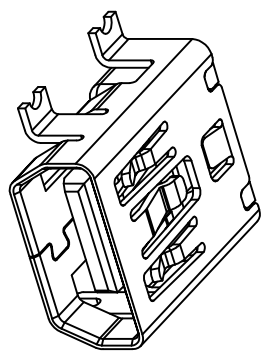

PRODUCT NUMBER ORDER

93 02-010 15- 02 R



- 1 PRODUCT NMAE:93=USB SERIES
- 2 PRODUCT :02=FEMALE
- 3 POSITION OF CONTACT (010=10PIN)
- 4 PLATING TYPE:
- 15:15U" ON CONTACT AREA,SOLDER -TAIL 1-3 G/F
- 5 02:STREAM NO.
- 6 R=REEL PACKAGE

PCB LAYOUT(TOP VIEW)

(TOLERANCE:±0.05)

4	CONTACT 02	5	PHOSPHOR BRONZE	GOLD PLATED OVER ALL
3	CONTACT 01	5	PHOSPHOR BRONZE	GOLD PLATED OVER ALL
2	HOUSING	1	L.C.P	COLOR:BLACK
1	SHELL	1	PHOSPHOR BRONZE	TIN 100U" PLATING
NO.	DESCRIPTION	QTY	MATERIAL	NOTE
UNLESS OTHERWISE SPECIFIED TOLERANCES				
深圳市睿兴业科技有限公司 SHENZHEN KRCOON TECHNOLOGY CO., LTD				
DECIMALS:	ANGLES:	TITLE		
X :±0.5	X :±2°	MINI USB 10PIN SMT+SM T P.		
X.X :±0.20	X.X :±1°	DWN	ALLEN	PART NO: 9302-01015-02R
X.XX :±0.10		CHKD	KEVIN	SCALE:1:1 UNIT: MM
		APVD	ERIC.W	SIZE: A3 SHEET:10F 1 REV: A

CUSTOMER COPY