
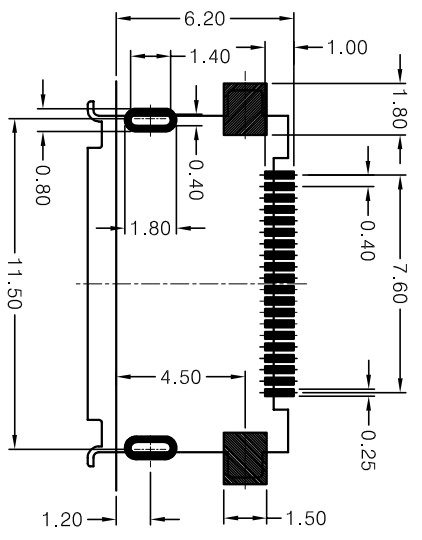
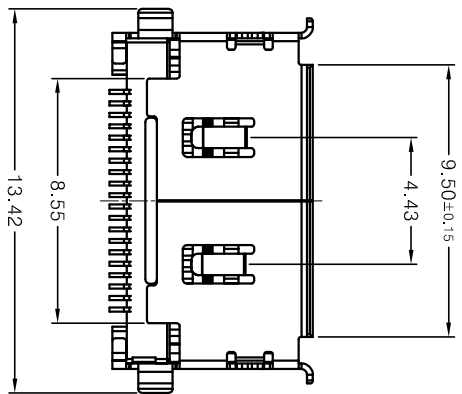
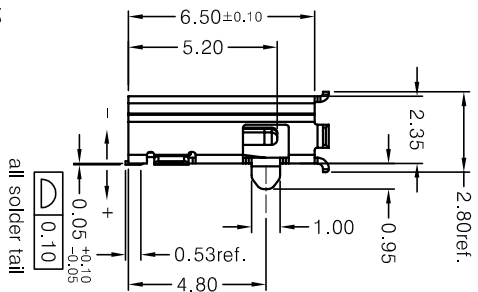
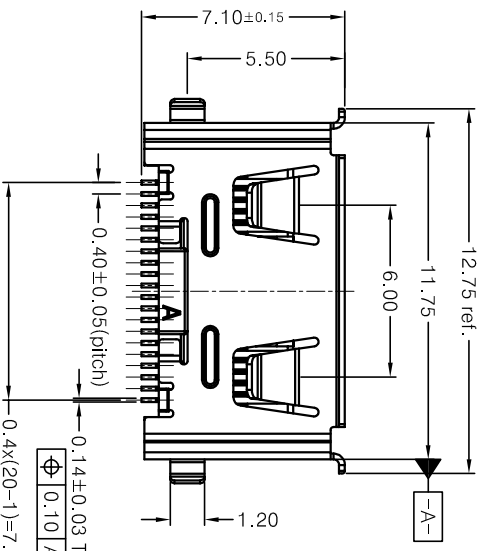
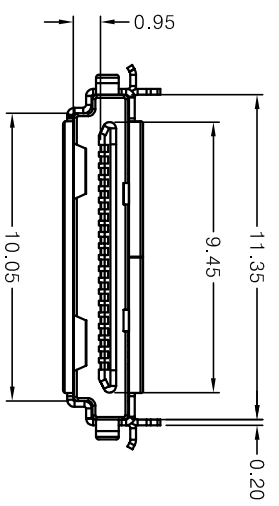




REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PROPOSE ONLY	ALLEN	04/14/08

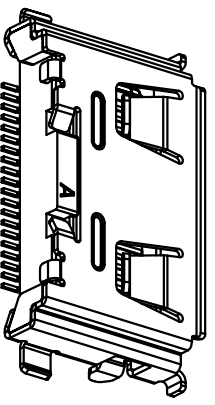

PCB LAYOUT(TOP VIEW)
(TOLERANCE:±0.05)

- ※ Specifications
1. Voltage Rating : 30V_{ac}/DC
 2. Current Rating : 0.3A/Pin
 3. Operating temperature : -30°C~+80°C
 4. Mating Force : 1.5kgf Max
 5. Un-Mating Force : 0.4~1.5kgf
 4. Durability : 5,000 cycles

- ※ NOTE
1. PLATING
 - 1) CONTACT
- Contact Area : Au 0.2_{µm} over Ni 1.0~5.0_{µm}
- Lead Area : Au 0.05_{µm} over Ni 0.2~3.0_{µm}
 - 2) METAL COVER : Ni 1.0~5.0_{µm}

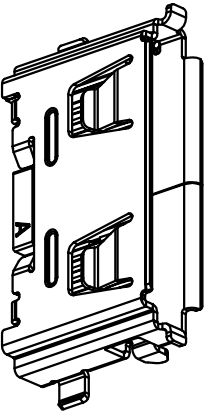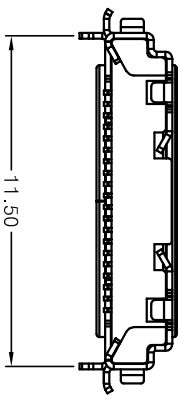

NO.	DESCRIPTION	QTY	MATERIAL	NOTE
3	CONTACT	20	COPPER ALLOY	GOLDFLATED
2	HOUSING	1	THERMOPLASTICS	COLOR:BLACK
1	SHELL	1	STAINLESS STEEL	TIN PLATED

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES:

X : ±0.5 X : ±2°
X.X : ±0.20 X.X : ±1°
X.XX : ±0.10

TITLE	EAR/MIC 20PIN FEMALE (SAMSUNG new Rev.)		
DWN	ALLEN	PART NO. 9202-02015-04R	
CHKD	KEVIN	SCALE:1:1	UNIT: mm
APVD	ERIC.W	SIZE: A3	SHEET:1OF 1

REV: A

CUSTOMER COPY



深圳市精睿兴业科技有限公司
SHENZHEN KROCONN TECHNOLOGY CO., LTD